

CHAINS

ESTABLISHED CORNERS FOR STATE OF OREGON-DEPARTMENT OF FORESTRY  
(See official plat)  
East One Sixteenth corner common to Sections 9 and 16, T3S,  
R8W, W.M., Tillamook County, Oregon.

ESTABLISHED

Var. 21 1/2 E

Set 1 1/2" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY E 1/16 S9 S16 1961 RS401", 34 inches in ground, and from which a:

58" Fir bears S8E 73.9 ft.; scribed E 1/16 S16 BT RS401.  
20" Fir bears N44W 51.5 ft.; scribed E 1/16 S9 BT.

Set 4" x 4" x 52" white painted Cedar post 1.0 ft. S.W. of corner pipe. Oregon State Forestry Department metal location poster on 58" Fir BT.

\*\*\*\*\*

Center One Quarter corner for Section 16, T3S, R8W, W.M., Tillamook County, Oregon.

ESTABLISHED

Var. 21 1/2 E

Set 1 1/2" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY C 1/4 S16 1961 RS401", 32 inches in ground, and from which a:


20" Fir bears N14W 7.7 ft.; scribed C 1/4 S16 BT RS401.  
19" Fir bears S65E 16.2 ft.; scribed C 1/4 S16 BT.

Set 4" x 4" x 52" white painted Cedar post 1.0 ft. N.W. of corner pipe. Oregon State Forestry Department metal location poster on 19" Fir BT.

Dated January 22, 1962

Established by Harold J. Russell under my direction.  
Harold Russell, Engineering Technician

Present and witnessed by A. Duncan  
E. Danielson

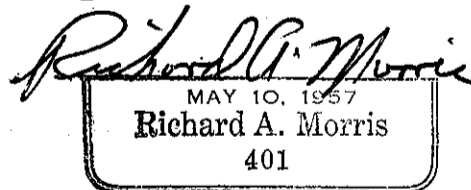

E. 1/16  
S 30' x 30'  
9-2

Can 1/4  
16-3-S-8