

5074.5 On the true line at the edge of a logging road

Set a 4" X 4" cedar post with a metal location poster marked Sec. Cor. 5, 6, 7, 8, T 1N, R 5W, 214.0 feet West.

5299.5

The corner to Sections 5, 6, 7, 8, determined on Retracement

At the corner point:

Set an iron pipe 1 1/2 inches in diameter, 3 feet long, filled with charcoal with an Oregon State Board of Forestry bronze cap stamped T 1N, R 5W, S 6 S 5 S 7 S 8 1949 199


from which:

A fir stump 32 inches in diameter, bears North 29° 30' East a distance of 35.1 feet scribed S 8, 199

A metal location poster on a fir snag 20 inches in diameter bears South 34° West a distance of 17 feet.

The above work partially done by Don Davis, transitman, Bruce Thomas & Wayne Frank, chainmen, Douglas Rogers, Flagman on July 25, 1949 under my direction and completed by myself and Don Davis on April 18, 1950.

Lyle E. Beyers
Forest Engineer

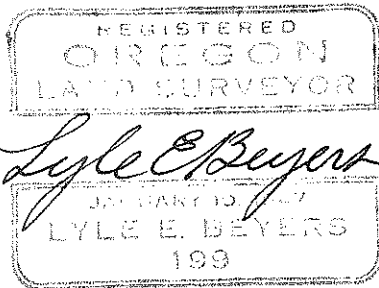

Page 2 of 2
Continued
from
Page 58