

CHAINS

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

Section corner common to sections 10, 11, 14, and 15, T1S R7W, WM., Tillamook County, Oregon.

ORIGINAL

Post, now missing, from which a:

- 6" Yew bears N43E 40 lks; now only roots left.
- 30" Fir bears S49E 48 lks, now 47" snag, scribe mark visible on partially exposed face.
- 28" Fir bears S54W 35 lks, now 30" snag, with scribe marks 7W S15 exposed.
- 14" Fir bears N50W 34 lks, now 18" snag, with scribe marks S10 BT exposed.

RESTORED CORNER AND BEARING TREES


Set 1 1/2" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY T1S R7W S10 S11 S15 S14 1952 2311," 28" in ground. Raised mound of stone around corner pipe, from which a:

- 24" Fir snag bears N84W 13.4'; scribed T1S R7W S10 BT RE 2311.
- 30" Fir snag bears N56°30'E 35.4'; scribed T1S R7W S11 BT.

Placed an Oregon State Board of Forestry metal location poster on 30" Fir snag BT and marked it: Sec 11 T1S R7W Sec. Cor 35.4 Ft. S56°30'W.

Dated August 15, 1952.

This corner was restored by Richard Morris, under my direction. Richard Morris - Compassman

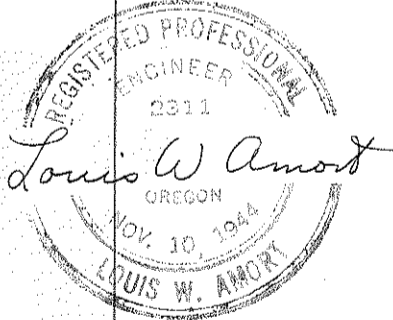

Present and witnessed by Robert A. Young Robert A. Young - Chairman