

CHAINS

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

Section corner common to sections 4, 5, 8, and 9, T2N R7W, W.M., Tillamook County, Oregon.

ORIGINAL

Basalt stone 14" x 11" x 7", now missing, from which a:

- 40" Fir bears N21E 78 lks; now 48" Fir stump, face cut off when logged.
- 19" Hemlock bears S48E 39 lks, now 25" down stub, scribes N 9 exposed.
- 10" Hemlock bears S14W 61 lks, now 15" down snag scribe marks T2N R7W S8 exposed.
- 16" Hemlock bears N24W 53 lks, now 20" stump, face gone.

RESTORED CORNER AND BEARING TREES


Set 1 1/2" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY T2N R7W S5 S4 S8 S9 1952 2311," 2 1/2' in ground, from which a:

- 5" Hemlock bears S42°30'W 86.3'; scribed T2N R7W S8 BT RE 2311.
- 3" Hemlock bears S37°30'E 20.5'; scribed S9.
- 54" Fir stump bears N31°30'E 60.3'; scribed T2N R7W S4 BT.
- 42" Fir stump bears N56W 60.0'; scribed T2N R7W S5 BT.

Placed an Oregon State Board of Forestry metal location poster on 3" Hemlock and marked it: Sec 9 T2N R7W Sec Cor 20.5 Ft. N37°30'W.

Dated August 15, 1952.

This corner was restored by Richard Morris, under my direction. Richard Morris - Compassman

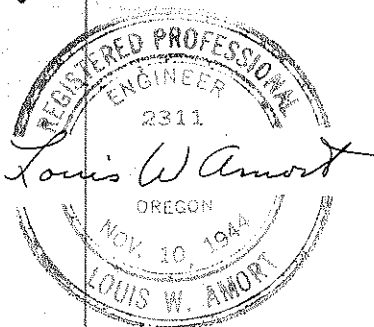

Present and witnessed by Robert A. Young - Chairman.