

CHAINS

Correction Report

ESTABLISHED CORNERS FOR OREGON STATE BOARD OF FORESTRY
(See official plat)

Center one quarter corner in Section 31, T1N, R6W, W.M.,
Tillamook County, Oregon

ESTABLISHED Var. 21 1/2° E

Set 1 1/2" x 36" galvanized iron pipe with 3" bronze cap
marked "OREGON STATE BOARD OF FORESTRY O 1/4 S31 1956 RS 359,"
33 inches in ground, and from which a:

51" Fir bears S13 1/2° E 100.5 ft.; scribed O 1/4 S31 BT RS 359.
31" Fir bears S41° W 77.1 ft.; scribed O 1/4 S31 BT.

Oregon State Board of Forestry metal location poster on 31"
Hemlock N48° E 3.5 ft.

Set 4"x4"x60" white painted Cedar post 2.0' S.

Correction Report

Center West one sixteenth corner in Section 31, T1N, R6W, W.M.,
Tillamook County, Oregon.

ESTABLISHED Var. 21 1/2° E

Set 1 1/2" x 36" galvanized iron pipe with 3" bronze cap marked
"OREGON STATE BOARD OF FORESTRY W 1/16 C - C S31 1956 RS 359,"
35 inches in ground, in mound of stone, and from which a:



10'x40' wide rock outcrop bears East 77.9 ft.; scribed X BC.
25'x40' wide rock outcrop bears N62 1/2° W 57.3 ft.; scribed XBO.
35" Fir snag bears N89° E 49.9 ft.; scribed RS 359.

Oregon State Board of Forestry metal location poster on 35"
Fir snag.

Set 4"x4"x60" white painted Cedar post 6.0' NE of pipe.

Dated May 31, 1957.

Established by *Richard Morris* under my direction.
Richard Morris, Transitman

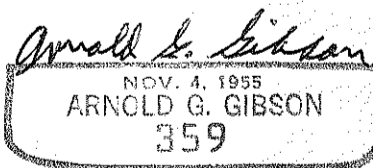

Present and witnessed by Robert Sturm
Craig Chambers