

McCULLOUGH, BRYANT & ASSOCIATES
Incorporated
P. O. BOX 857
CORVALLIS, OREGON 97330

January 13, 1968

Mr. John L. Carlich
County Surveyor
Tillamook, Oregon 97141

Dear John:

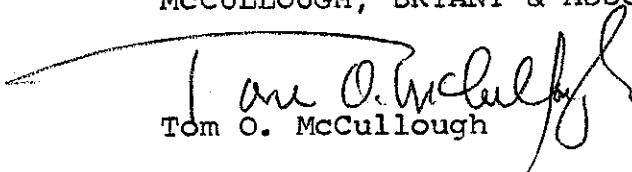
I'm going over the survey I filed in January 1967 of Section 2, T.4 S., R.7 W., W.M. for Oregon Alder-Maple. I found some minor typing errors I would like corrected; in the corner data sheets.

Page 1, line 15 should read "...the east $\frac{1}{4}$ corner of section 2...". Page 1, line 17 'which' is misspelled. Page 2 under NE CORNER SECTION 2 REMONUMENTED should be "... brass cap marked 35, 36, 1, 2...".

If you would correct these I would appreciate it.

Yours Very Truly

MCCULLOUGH, BRYANT & ASSOCIATES


Tom O. McCullough

TOM:rb

PAGE 2

SECTION 2, T4S, R7W, W. M.

1965-1966

NW CORNER SECTION 2 REESTABLISHED

Found old blazes on snag approximately 40 feet east of reestablished corner. Found rock S66W, 50 feet in distance from snag. Rock measured 5"X10"X15" which was size of original rock. Stone appeared to have rolled down hill. Found no markings due to heavy scaling. Set 1"X36" pipe with brass cap marked S34, 35, 2, 3 ORLS 650 by proportionate measurement and placed rock at base from which.

A 10" fir bears N6E 23.0 feet, on which I scribed T3S R7W S 35 BT 650

A 23" fir bears N12 1/8 W 39.0 feet on which I scribed T3S R7W S 34 BT

A 7" fir bears S69 1/2 W 37.0 feet on which I scribed T4S R7W S 3 BT

A 27" fir bears S57E 50.0 feet on which I scribed T4S R7W S 2 BT

N 1/4 CORNER SECTION 2 REESTABLISHED

After an extensive search for corner, I set, by proportionate measurement, a 1"X36" pipe with brass cap marked 1/4 ORLS 650 for corner from which

A 21" fir bears N44 1/4 W 16.2 feet on which I scribed T3S R7W S 35 1/4 BT 650

A 19" fir bears S62 1/2 W 17.0 feet on which I scribed T4S R7W S 2 1/4 BT

NE CORNER SECTION 2 REMONUMENTED

Set 1"X36" pipe with brass cap marked ^{35, 36, 1, 2} ~~34, 35, 1, 2~~ ORLS 650 by original stone with a notch on east edge still visible from which

A 16" fir bears S57 1/2 W 46.6 feet on which

A 18" fir bears N57 1/2 E 46.6 feet on which I scribed T3S R7W S 36 BT 650

A 34" fir bears N 1/2 W 33.9 feet on which I scribed T3S R7W S 35 BT

A 16" alder bears S56 1/2 W 96.5 feet on which I scribed T4S R7W S 2 BT

No available tree for a BT in Section 1

REGISTERED
OREGON
LAND SURVEYOR

JULY 10, 1964
TOM O. McCULLOUGH
650

BOOK 3

Page 56