CERTIFIED RECORD OF LAND CORNER MONUMENTATION

(Reference FSH 5681.65)

History of original corner establishment:

Surveyed by Hendry Meldrum
under Contract No 500 April 24, 1884
"Set Post"
A Fir 48" N67E 114 lks.
" " 50" S51°W 97 lks.
5chs. North of Top of ridge.

DIAGRAM

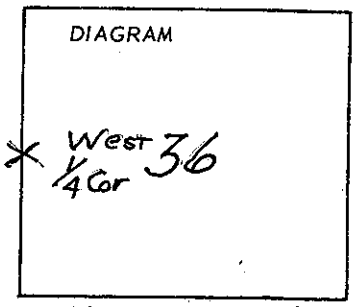

T 35 R 8W

Description of corner evidence found:

Found an old squared stake being used for Corner. Could not find B.T.'s that fit. There are many large snags in area but most have exterior gone. Upon surveying the West side of section I found it over 100 ft long. Mid point fell over 100' North of stake. I Talked with Merwin Whitmore at Hebo, and he said he set the stake by coming in from EAST 1/4 Corner Sec. 36. That he found no B.T.'s, but set stake as reference only for landowner at that Time, but not for corner point.

Description of monument and accessories I established to ~~perpetuate~~ re-establish the ~~original~~ location of this corner

at midpoint between Section Corners I Set.
a 2" galv. pipe with brass Cap on top. MKd 1/4 " 35 | 36 1966 RPE ore 2301.
from which:
An. 8" Douglas Fir bears N80°W 134 3/4 ft. Scribed 1/4 535 CS BT."
AN 32" Douglas Fir bears S80°E 75 1/2 ft. Scribed " 1/4 536 CS BT."
Corner is in line between B.T.'s ON the SWly slope of a small knoll. a small Swamp bears SW about 40 ft. Corner is in cut over land about 40' West & 120' North of Cutting Corner-of timber. ~~A cat~~ the end of a Cat road bears West 20 ft.

Office of County Surveyor County of Tillamook
State of OREGON, I hereby certify that the within instrument was filed in this office for record on the 6th day of FEBRUARY, 1967, at 9:30 o'clock A.M., (signed)
John L. Colvin C.S.
(COUNTY OFFICIAL) by (DEPUTY)

BOOK 3 1

Form R6-5680-182 (12/63)