


County Surveyor's Record, Tillamook County, Oregon

Feet

- 2646.44 The position for the N 1/4 corner to Section 2. I did not set any monument at this position.
- 2663.79 The restored position for the original 1/4 corner to Sections 35 and 2 as established by Henry Meldrum. At this point (which falls under the northeast corner of a cattle guard crossing the Boulder Creek Road), I set a brass cap marked



from which

- An old Spruce bears N24°E, 360 lks
This is now an old rotted stub with two faces, one above the other, still visible. No markings could be found.
- A 25" Fir bears S24°E, 30.6 feet to face
Scribed 1/4 S2 BT with "X" above.
- A 10" Alder bears N22°E, 40.8 feet to face
Bark scribed 1/4 S35 BT 650.


The latter two BT's are tied also to the 5/8" iron rod, the monument to the S 1/4 of Section 35 as previously noted.

Continuing on the true line between T3 and 4S, R9W (Samuel Caudle leaves Meldrum's line at this point as indicated in his notes).

N89°12'12"E

- 4585 Branch, 2 feet wide, course N80°E
- 4887 Branch, 6 feet wide, course North
- 4915 Branch, 4 feet wide, course North
- 5201.79 The closing corner to Section 1 and 2 bears North 1.83 feet, which is a 1" iron pipe.

At this point, I set a 2 1/2" x 30" iron post with brass cap marked

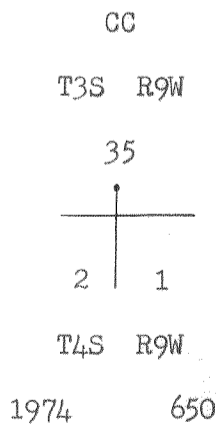

from which

- An Alder stump bears S48 3/4°E, 10 lks
Original BT--no scribing visible.
- An Alder stump bears S40 1/2°W, 10 lks
Original BT--no scribing visible.
- A 14" Alder bears S22°W, 5.1 feet to face
Bark scribed S2 BT.

See map B 661