



CERTIFIED RECORD OF LAND CORNER MONUMENTATIO.

History of original corner establishment: Corner was established by S.G. Caudle in 1882 while surveying under G.L.O. Contract No. 419. Caudle set a post for the 1/4 corner to Sections 19 and 20, T 3 N, R 9 W, W.M., from which a Hemlock 10 in. diameter bears N 20° E 89 Lks. marked 1/4S BT, a Cedar 19 in. diameter bears N 20° W 106 Lks. marked 1/4 S BT.

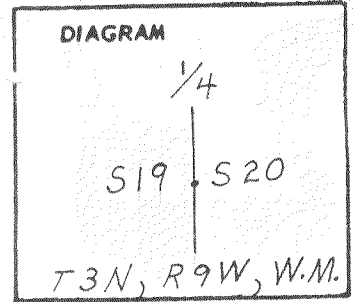

Description of corner evidence found: I found both of the original bearing trees scribed by Caudle in 1882. The 19 inch Cedar is now 46 inches in diameter and has an old overburden scar. I chopped open the scar and found a small portion of reversed scribing on what appears to be the bottom of the original face. The rest of the face has rotted away. I counted the growth rings back 92 years and found that this tree was approximately 19 inches in 1882 as reported by caudle. The 10 inch hemlock is now a 16 inch, very rotten, windfall. I could not find any scribing on this tree. I re-constructed the upright position of said Hemlock and found the position for the corner to fall in the center of a creek. From said corner position the found original bearing trees bear as reported by Caudle: Upright position of hemlock bears N 20° E 59 feet to face, Cedar bears N 20° W 70 feet to face.

Description of monument and accessories I established to perpetuate the original location of this corner To perpetuate the found position of this corner I set a witness corner 85 feet North of, when measured along the section line, the found 1/4 corner to Sections 19 and 20. For said witness corner I set 30 inches in the ground a 1 1/2 inch X 36 inch concrete filled, galvanized iron pipe with a 2 inch brass cap stamped as shown; from which I scribed two bearing trees: 16 inch Hemlock bears South 12.3 ft. to face scribed " 1/4S19 WC BT ". 6 inch Cedar bears N 16° W 34.95 ft. to face scribed " 1/4 S19 WC BT ".



I hereby certify the above corner monument was re-established as herein described during the month of October, 1974.

witnesses:

Dustin Veerhulst
Allin Hofmann

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Karl F. Foeste

OREGON
JULY 12, 1968
KARL F. FOESTE
0849

Office of Surveyor County of Tillamook
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the day of
..... by
(COUNTY OFFICIAL) (DEPUTY)