


CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment: Corner was established by S.G. Caudle in 1882 while surveying under G. L. O. Contract No. 419. Caudle set a post for the corner to Sections 17, 18, 19, and 20, from which a Hemlock 44 in. dia. bears S30°W 29 Lks. marked T3NR9WS19BT, a Hemlock 12 in. dia bears S54°E 62 Lks. marked T3NR9WS20BT, a Spruce 96 in. dia. bears N60°E 60 Lks. marked T3NR9WS17BT, a Spruce 10 in Dia. Bears N80°W 66 Lks. marked T3NR9WS18 BT. In June of 1955 W.A. Markham, P.E. No. 1842, reports that he found an original bearing tree at this corner.

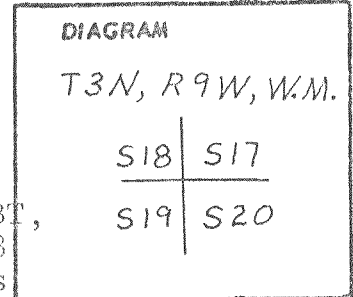

( see Markhams survey of the Range line between Ranges 9 and 10 West, T3N, W.M. ) In 1970 Matt Dunkel of Boise Cascade Corporation found the Original N.E. bearing tree, and from it he set a 1 1/2 inch galvanized iron pipe with a 2 inch brass cap stamped as shown below. This fact was reported to me by Mr. William Robert Howe, also of Boise Cascade Corporation. Howe also reported to me that Dunkel also scribed tow new bearing trees at this corner.

Description of corner evidence found: I found the 1 1/2 inch, galvanized, iron pipe with a 2 inch brass cap stamped as shown below and set by Matt Dunckel in 1970. Fronsaid iron pipe monument I found the following bearing trees to bear as follows: root collar remains of original 40 in. Hemlock bears S 30° W 19.1 ft. to estimated position of old face. Stump remains of original 96 inch Spruce bears N 60° E 39.6 ft. to face. Portion of original scribing is still visible: "T3N 9". The original S.E. and N.W. bearing trees are now missing. The new bearing trees scribed by Matt Dunckel in 1970 bear as follows: 20 in. Spruce S 45° W 13.2 ft. to scribed face. 15 in. Spruce bears N 85° W 23.6 ft. to scribed face. A 35 in. Spruce bears West 25.5 ft. to large " X " chopped in tree; apparently no record as to who chopped this " X ".

Description of monument and accessories I established to perpetuate the original location of this corner As the position of Matt Dunckel's iron pipe monument is in correct record relationship to the two found original bearing trees, I am accepting it as monumenting the original position of the corner to Sections 17, 18, 19, and 20, T 3 N, R 9 W, W.M. I scribed onenew bearing tree which bears as follows from said iron pipe: 13 inch Hemlock bears N 69° 30' E 34.7 ft. to face scribed " S17 BT ".

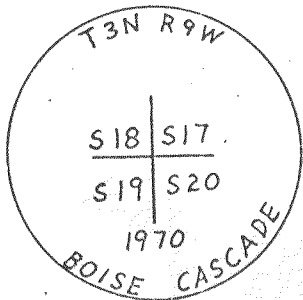

I hereby certify the above corner monument and its bearing tree accessories were found by me as herein described on September 24, 1974.



Witnesses: *Dwain Vermilyea*  
*Allen Hofmann*

Office of ..... Surveyor ..... County of ..... Tillamook  
State of Oregon ..... I hereby certify that the within instrument was filed in this office  
BOOK 5 for record on the ..... day of .....  
(COUNTY OFFICIAL) by ..... (DEPUTY)

305