


CERTIFIED RECORD OF LAND CORNER MONUMENTAL

History of original corner establishment:

Wygant in 1905 set a fir limb post 3' long, 4" sq., 24 ins in ground for closing corner of Sec. 20 and 21, mkt CC T6S R10W on S, S21 on E, and S20 on W faces, with 3 grooves on S., and 4 grooves on E faces from which:

An alder 12" diam. bears N5E 37 lks mkt T6S R10W S21 BT.
An alder 8" diam bears S83°W 35 lks mkt T6S R10W S20 BT.

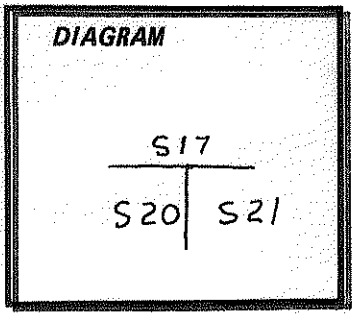

Description of corner evidence found:

Monument Found:

Find 4" x 6" x 30" long badly decayed post wired to a 1/2" x 48" iron pipe. T6S visible on old post. Iron pipe believed to be set by M. Whitmore.


BT's Found:

Rotted alder stump bears N5°E 24.4 ft (orig.).
SW BT gone.
spruce 66" diam bears N48°W 21.4 ft (record 22.0). M. Whitmore BT. Healed face.
Wygants Creek call to west (1908) fits well.

Description of monument and accessories established to perpetuate the original location of this corner:

Monument set:

I replace orig. post with 3" x 30" aluminum cap with magnet in top and bottom, 24 ins. in ground mkt:



Bury orig. post and iron pipe alongside aluminum cap. Post and Attn. sign 4' south.

Accessories:

Hemlock 7" diam bears N80°W 4.7 ft. mkt T6S R10W S17 CC BT. No trees available in Sec. 20.
Fir 14" diam bears S57°E, 37.7 ft, mkt T6S R10W S21 CC BT.

Painted 6" red band around all BT's.
Painted faces on new BT's, put Attn signs on back of all BT's, and put brass washer on lower BT blaze of new BT's.

September 19, 1979

Crew: L. Hunnemuller
L. Whitmore
M. Schwartz
D. Chesebro

REGISTERED PROFESSIONAL LAND SURVEYOR

L. W. Hunnemuller

OREGON AUGUST 22, 1975 L. W. HUNNEMULLER 1050

Office of...Tillamook Co. Surveyor... County of... Tillamook
State of...Oregon... I hereby certify that the within instrument was filed in this office for record on the...19... day of...Sept... 19...
...County Surveyor...J. L. Carlich... by ... Allan E. D... (DEPUTY)