

County Surveyor's Record, Tillamook County, Oregon

CHAINS

ESTABLISHED CORNER FOR STATE OF OREGON--DEPARTMENT OF FORESTRY

Northeast One Sixteenth corner for Section 4, T1N, R7W, W.M., Tillamook County, Oregon.

ORIGINAL

Corner was not set due to log deck occupying corner point, from which a:

Reference Monument, 1½" x 36" galvanized iron pipe, 15" in ground, with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY RM NE 1/16 1953 RE 2311," bears N89°00'22"W 45.0 ft.; now in place.

60" broken fir stump bears N17½°E 374.2 ft.; now 32" stump, scribes NE 1/16 S 4 BT visible

36" fir stump bears N62½W 61.3 ft.; in place, portions of scribes visible.

NOTE: DISTANCES MEASURED TO CENTERS OF STUMPS.

Var. 21½°E

ESTABLISHED



Set 1½" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY NE 1/16 S 4 1982 RS 401", 35 inches in ground, and from which a:

6" Alder bears S73°E 5.6 ft. to bark scribes NE 1/16 S 4 BT.

Set 4" x 4" x 60" white painted Cedar post SE 1.0 ft. from corner pipe. Oregon State Forestry Department metal location poster on original 36" fir stump BT. Also poster on 6" Alder BT.

Dated: April 19, 1982

Restored by Anthony J. Klosterman under my direction.
Anthony J. Klosterman, District Engineer

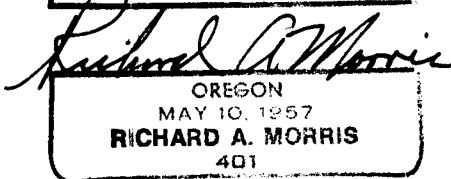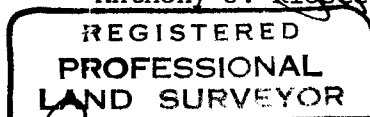

Present and witnessed by: David B. Buchholz
Danny J. Benson

See map A-4673