

3
10

TILLAMOOK COUNTY REWITNESS # 110

N. 10 SEC. 3
COR. 10 T. 3N R. 10 W., WM.


HISTORICAL: GLO Pg 55 ± 1893 SET POST

CONDITION	FOUND:
NOT FD.	6" HEMLOCK N 14° E 34 LBS GLO Pg 55
NOT FD.	16" HEMLOCK 584° W 42 LBS GLO Pg 55

COMMENTS:

REWITNESS

SET 2" IRON PIPE WITH 3" BRASS CAP IN 10" TILE & CEMENT
BY SINGLE PROPORTION FROM FD. CORNERS
* 86" Har Section 15' EAST

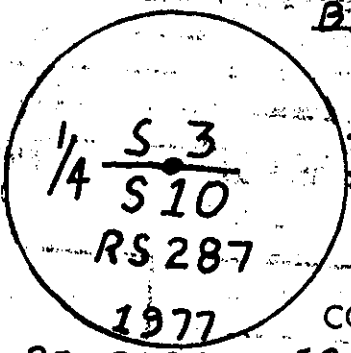

NEW ACCESSORY:	BEARING	DISTANCE	SCRIBED
* 8" HEMLOCK	S. 88° E.	33.50'	1/4 S. 10 BTCS
* 8" HEMLOCK	N. 1° W.	38.88"	1/4 S. 3 BTCS

COMMENTS: THIS CORNER WAS SET BY SINGLE PROPORTION FROM SECTION CORNERS $\frac{312}{1011}$ 3N10 & $\frac{413}{410}$ 3N10 AND IS LOCATED ± 40' NORTH OF A LOGGING ROAD ON A STEEP SLOPE.

IN THE PRESENCE OF: GALE ARTHUR & DAN MC NUTT

DATE: 5-18-77

PHOTO#:

County corner tag affixed.

TITLE