

TILLAMOOK COUNTY REWITNESS # 162
 SEC. _____
 COR. 2 1/2 T 1 S R 8 W W., WM.

HISTORICAL: GLO PAGE 50 158 1883

Book	PAGE	MAPS
2	265	B-399
CT12	72	B-443
4	19	
1	13 & 170	


CONDITION GOOD FOUND 1 1/2" I. P. WITH 3" QSBF BC. BK. 2 Pg. 265

GONE	5" HEMLOCK	N. 56° W. 15 LKS	G.L.O. Pg 50
FD PILE OF ROT	6" HEMLOCK	N. 61° E. 47 LKS.	" " "
GONE	6" HEMLOCK	S. 24° E. 44 LKS.	" " "
GONE	8" HEMLOCK	S. 57° W. 58 LKS.	" " "
FD ROTTEN STUB	30" HEMLOCK	S. 84° W. 8 1/2 FT.	BK. 1 Pg 13 & 170
FD BURNT OUT ROOT	1/2" DOWELL. IN ROOT OF BURNT OUT 60" FIR STUMP	N. 2 1/2° E 18' FT.	" " "
FD SCRIBING VISIBLE	50" FIR STUMP	N. 40° E. 120 FT.	BK 2 Pg 265
FD ROTTEN STUMP NO SCRIBING	36" FIR SNAG	S. 75° W. 77 FT.	BK 2 Pg 265

NONE OF THE BEARING-TREE IN FIELD NOTE BOOK CT 12 AT PAGE 72 WERE FOUND
 ALSO FOUND 1 1/4" I. P. VERY RUSTY ALONGSIDE OF Q.S. G.F. I. P. & C. BK 1 Pg. 13 & 170

REWITNESS

1 SET 10" CONCRETE CYLINDER AROUND FOUND QSBF 1 1/2" IRON PIPE WITH 3" BRASS CAP & 1 1/4" I. P. ALONGSIDE.
 * 72" Hat Section NORTH 15 FEET

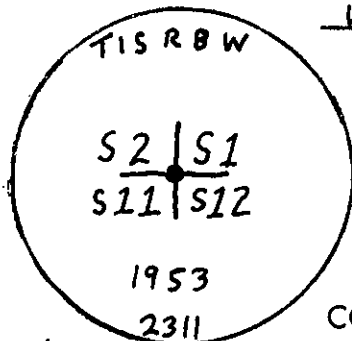

NEW ACCESSORY: DISTANCES TO NAIL WITH WASHER IN FACE 2

* 15" FIR	N. 39° W. 46 1/2	T 1 S R B W BT CS
* 11" FIR	N. 41° E. 71 1/4	S 1 B.T CS
* 12" FIR	S. 59° E. 15 9/8	S 12 CS B.T
* 7" FIR	S. 8° W. 36 4/2	S 11 CS B.T

COMMENTS: THIS CORNER IS LOCATED ON A WLY SLOPE 100' NORTH OF A STEEP SLY SLOPE.

IN THE PRESENCE OF: DAN MCNUTT AL DVORAK

DATE: 10-14-86 PHOTO#: _____

* = County corner tag affixed.

TITLE _____