

C.C. COR. SEC. 31 T. 35 R. 10E11W., WM.

HISTORICAL: GLO 3510 BK. 3 P. 208 1933 I.P.

MAPS		
F-27-2		

CONDITION WASHED OUT FOUND: 2" I.P. WITH 3" BRASS CAP BK. 3 P. 208

Now 20" STUMP SCRIBING - VISIBLE	12" HEMLOCK	S 51 1/2° W. 91 LKS	ORIGINAL BT
NO ROTTEN MOUND WITH YELLOW	24" HEMLOCK	S 17° E. 60 LKS	ORIGINAL BT
ALL TAGS MARKED BY LAYING			
NEAR BY			

COMMENTS: A ± 12' Ø SPR LOG IS LAYING ACROSS CREEK ± 10' SWLY OF CORNER

REWITNESS


I SET 3" BRASS CAP IN SOLID ROCK IN THE BOTTOM OF A SMALL CREEK.

FD 4 x 4 x 60" WHITE POST 17° ELY.

* 60" Hat Section 92' SOUTH

NEW ACCESSORY: DISTANCES TO FACE

* 6" HEMLOCK	S 14° E. 12 28'	S 6 BT CS
* 8" HEMLOGIS	N 72° W 10 20'	CC BT CS

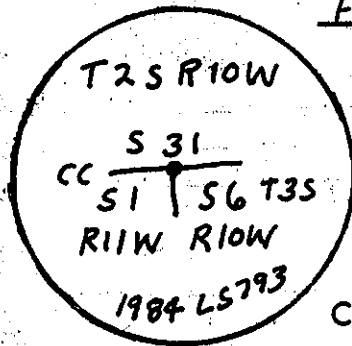

COMMENTS: THIS CORNER IS LOCATED I 600' NELY UP A SMALL CREEK FROM CAPE LOOKOUT ROAD. THIS CORNER WAS RESET FROM FOUND - ORIGINAL B.T.S. FOUND ORIGINAL IRON PIPE WITH BRASS CAP LAYING IN CREEK.

IN THE PRESENCE OF: DAN MCNUTT AL DVORAK

DATE: 9-10-84

PHOTO#: 9 12' FA All on Duncan, C.S.

* = County corner tag affixed.

TITLE