

TILLAMOOK COUNTY REWITNESS #571


N.W. COR. SEC. 6 | 5
COR. 7 | 8 T 3 S R 10 W., WM.

HISTORICAL: G L O BK 35 10 pg. 60 (1890)
 Dependent Resurvey BK 3 pg. 205 + 206
 ReWitness by G L O 1933.
 ReWitness by Leonard Whitmore 1976

CONDITION	FOUND:
Fd. firmly set	filled with concrete IRON Post 3 ft long, 2 ins. dia. 27 ins in the ground with the Brass cap rusted and laying alongside G.L.O. 1933.
Fd. remains of Hemlock stump	N 42° E 23 ft (G L O 1890).
Fd. old face on down Hemlock tree, axe marks on face, possible scribe MKC.	(G L O 1890). S 79° E 29 ft
Gone COMMENTS:	12" Hemlock S 72° W 11 fts. (G L O 1890).

REWITNESS

1 SET A 1 1/2" x 30" IRON PIPE with a BRASS CAP
 in a 8" Dia. ALUM. FORM FILLED WITH CONCRETE
 I reset an iron post 1 1/2" ft S.E. Post has "Boundary" NEW ACCESSORY: and "Attention" signs attached.



COMMENTS: Corner is approx. 70 ft West of creek running SOUTH. IN 1890 G L O set post and MKd. B.T.s. IN 1933 G L O Rewitnessed the corner, set B.C. from original B.T.s. IN 1976 Leonard Whitmore rewitnessed the corner and MKd. now B.T.s.

IN THE PRESENCE OF: TERRY JONES
 GALE ARTHUR

DATE: Aug. 11, 1981 PHOTO#: REC 7-9-1981
 COUNTY COM. B. BEWITNESS TITLE

County corner tag affixed.

TILLAMOOK COUNTY REWITNESS Card 2 of 3

SEC. 6/5
COR. 7/8 T 3 S R 10 W., WM.

HISTORICAL:

CONDITION


FOUND:

Fd.	Stump hole	tree gone	(GLO 1933 20" Hem. N42W 431Ks)
Gene			GLO 1933 16" Hem. N66E 791Ks)
Fd.	Good	12" Hemlock	with healed over face, N32°W 2°ft to face
Fd.	Good	12" Hemlock	" " " " S56°W 782ft to face
Fd.	Good	12" Hemlock	" " " " S86°E 91ft "
Fd.	Good	16" Hemlock	" " " " N29°E 935ft "

COMMENTS: Last four trees scribed and recorded by L. Whitman in 1976.

REWITNESS

I SET

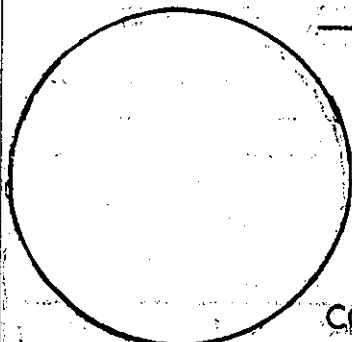

" Hat Section

NEW ACCESSORY:

COMMENTS: I also found a U.S.F.S. tag on a stump 20 ft south of the corner.

IN THE PRESENCE OF:

2" E" DFC

DATE: Aug. 11, 1981 PHOTO#: REC 1-4-1981 Allen Pearson C.S.

* = County corner tag affixed.

TILLAMOOK COUNTY REWITNESS TITLE

FOREST SERVICE		CORNER RECORD (SEARCH)		Tract or	Cor. No.
E-5		(Ref. FSM 7151.4)		Survey No.	No.
S. 5 R. 10 W. D. HEBB		County TILLAMOOK		Card 3 of 3	
T. 10 N. R. 10 W. D. HEBB		State ORE.			
CORNER DIAGRAM		DESCRIBE CORNER MONUMENT FOUND			
		GLO 1933 SET BRASSCAP 20" HEM., S. 79° E., 45 LKS. 12" HEM., S. 72° W., 11 LKS. 20" HEM., N. 42° W., 43 LKS. 16" HEM., N. 66° E., 79 LKS.			
PHOTO IDENTIFICATION DATA		DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND			
Photo No. ETT-5-1		FOUND 2" GALV. PIPE FILLED WITH CONCRETE. BRASSCAP HAS RUSTED OFF AND LAYING UPON THE GROUND. SET IRON POST 1 FT. S.E. - ATTACH BOUNDARY AND ATTENTION SIGNS.			
Object Ident.		DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER			
Set. By		ALL BT'S HAVE BEEN DESTROYED BY LOGGING. CORNER IS APPROX. 70 FT. W. OF CR. RUNNING SOUTH.			
PLANE COORDINATE POSITION		Signature		Date	
Date		Leonard Whitmore		2-13-76	
Zone		OVER			
Set. By					
Agency					

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT			
ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE			
I DESCRIBE 4 NEW BT'S: 14" FIR, N. 29° E., 9 FT. SCRIBED "T3SRK1005 BT." 9" HEM., S. 86° E., 9 FT. SCRIBED "T3SRK1005 BT." 10" FIR, S. 66° W., 8 FT. SCRIBED "T3SRK1005 BT." 8" FIR, N. 32° W., 2 FT. SCRIBED "X BREAST HEIGHT AND BT 1 FT. ABOVE gr" DISTANCES ARE SIDE-CENTER. VAR 21" Leonard Whitmore 2-13-76			
Work Done By	Title	Date	State Registration No. or Agency
Certified Cor. Record Prepared?	Yes	No	Filed At: Date
REMARKS			