


File No. **E-15** (Ref. FSM 7151.4) Survey No. **REVISION**
 T. **3 S** R. **10 W** D. **HEBO** County **TULLA**
 Corrid. **W.M. N.F. SIUSLAW** State **ORE.** **1976**

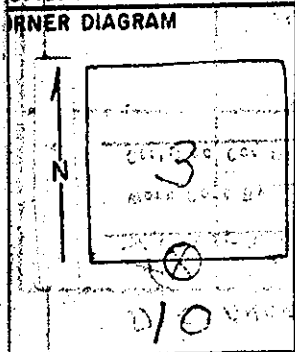

DESCRIBE CORNER MONUMENT FOUND
GLO 1884 SET POST & MARKED # 583
12" FIR, S. 84° E., 30 LKS.
10" Hem., S. 67° W., 17 LKS.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND
M. WHITMORE, 1948, FOUND 18" SNAG, S. 84° E., 30 LKS.
WITH VISIBLE SCRIBES "BT."
CORNER POST & S.W. BT ARE GONE.
WHITMORE REFERENCED A 14" Hem., S. 24° E., 18 LKS.

PHOTO IDENTIFICATION DATA
 Photo No. **ETS-9-45**
 Filed At:
 Subject Ident. **2001**
 Sent By:
 Agency:

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER
4-5-76
C-2 HAS FRESHLY LOGGED NEXT TO THIS CORNER & NEAR
ING DOWN THE ORIG. S.E. SNAG.
MEASURING FROM WHITMORES REFERENCE HEMLOCK I
RELOCATE THE CORNER POINT, MEASURING FROM THE CORNER
S. 84° E., 30 LKS I FOUND ORIG. S.E. STUMP - SMALL PIECE OF WOOD SHOWS "B."

MONUMENT DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT
CORNER POINT FALLS IN CENTER OF A SOLID 4 FT. LOG.
DRIVE 1/2" IRON ROD AT CORNER POINT IN LOG.
SET IRON FENCE POST 2 FT. SOUTH.

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE
I SCRIBE 2 NEW BT'S!
36" FIR STUMP, N. 4° W., 19 FT. SCRIBED 1/4 S 3 BT.
19" Hem., S. 50° W., 22 FT. SCRIBED 1/4 S 10 BT.
DISTANCES ARE TO SIDE-CENTER. VAR. 21°.
Leonard Whitmore, Tullahoma Deputy County Surveyor, 4-2-76

Work Done By _____ Title _____ Date _____ State Registration No. _____
 or Agency _____
 Certified Cor Record Prepared? Yes No Filed At _____ Date _____

REMARKS
T. 3 S R. 10 W 1/4 3/10
 Signature: *Leonard Whitmore* Date: *4-2-76*