


T. 3 S. 2 R. 10 W. R.D. HEBO County TILLA. # 610
 M. WILL N.F. SIUJLAW State ORE.

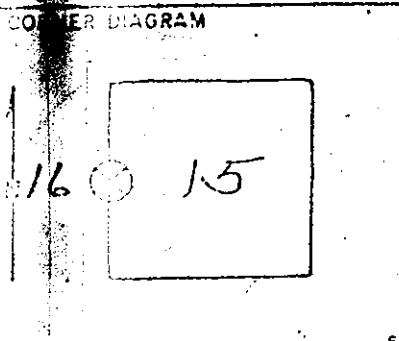

DESCRIBE CORNER MONUMENT ~~FOUND~~ GLD 1882 SET POST 4 MKD;
10" HEM, N. 40° E, 37 LKS.
12" HEM, S. 15° W, 57 LKS.

PHOTO IDENTIFICATION DATA
 Photo No. _____
 Filed At _____
 Object Ident. _____
 Ident. By _____
 Signature _____

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND
FOUND 1/2" GALV. RUSTED PIPE 24" ABOVE GROUND AND
BENEATH A LOG THAT IS 2 FEET ABOVE GROUND.
FOUND 38" HEMLOCK, N. 40° E, 24 1/4 FT. WITH SCRIBE
MARKS "BT" SHOWING IN A CHOPPED OPEN FACE.
THE SW BT IS GONE

PLANE COORDINATE POSITION DATA
 State _____ Zone _____

 Estab. F. _____
 Agency _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER
CORNER IS 12 FT. WEST OF A SMALL BROCK
RUNNING N. 32° W.

Signature Whitmore Title Forestry tech Division Timber Headquarters Hebo Date 2-20-75 7100-52 (3/68)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE
DESCRIBE ONE NEW BT;
4" HEMLOCK, N. 67° W, 19 1/2 FT. SCRIBED 1/4 SIB BT. VAR. 21°
DISTANCE TO SIDE CENTER.

Leonard Whitmore Tillamook County deputy surveyor, 2-20-75

Work Done By _____ Title _____ Date _____ State Registration No. _____ or Agency _____

Certified Cor. Record Prepared? Yes No Filed At _____ Date _____

REMARKS
L. WHITMORE (NOW RETIRED) WAS DEPUTIZED BY J. L. CARLICH, C.S.
TO REWITNESS ORIGINAL EVIDENCE. I ACCEPT THIS AS REWITNESS
OF ORIGINAL EVIDENCE. 2-24-1981 Allan E. Duncan C.S.