

TILLAMOOK COUNTY REWITNESS #618



N. 1010 SEC. 18  
1/4 COR. 19 T 3 S R 10 W., WM.  
S. DEC. #


HISTORICAL: GLO Pages 46 & 47  
@ 40.00 Chains -- Set post marked 1/4 S on the north face of post -- Dug pits, 18" x 18" x 12" deep 8 LKS. N and S from post -- post is 4' long x 6" dia  
MAP F 40-58 MAP C-28 MAP A-1580

CONDITION	FOUND:
and no evidence of the original 1/4 corner	

NOTE \*  
Corner position is located in an active sand dune, COMMENTS: Therefore a Witness Corner was established.

REWITNESS RE-ESTABLISHED CORNER

1 SET 1 1/2" x 30" Iron Pipe with brass cap marked as sketch  
72" Hat Section N.W. NORTH 10 feet

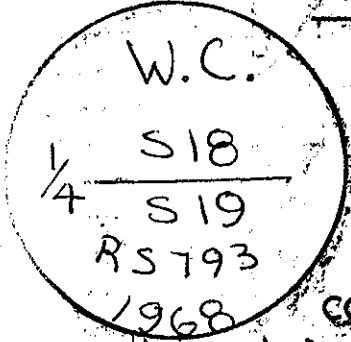

NEW ACCESSORY:	SCRIBED
22" Fir	S76W 1490 WC 1/4 S19 BT CS
20" Fir	N23 1/2 E 3278 WC 1/4 S18 BT CS

Witness corner falls in deep depression at base of active sand dune  
WITNESS CORNER IS 350.00 WEST OF TRUE 1/4 CORNER 18/19 3510

COMMENTS: Using available information from County records and taking a steller for a true meridian, A.E. Duncan -- RS 793 -- Traversed the section line between sections 18 & 19 3510W. With active sand in the 1/4 corner position, A witness corner was established a more stable IN THE PRESENCE OF: A.E. Duncan RS 793  
Gale Arthur  
and Refer to field notes (3510 section) R. Lindsey

DATE: 6-11-68 PHOTO: REC  
\* - County corner tag affixed. TILLAMOOK COUNTY TITLE GWV

REWITNESS

1 SET 2" IRON PIPE WITH 3" BRASS CAP IN CONCRETE

"x "x " Post N.W. feet  
" Hat Section S. E.

W.C.  
1/4 S 18  
S 19  
RS 793  
1974

NEW ACCESSORY:

YELLOW COR TAGS

COMMENTS: RESET CORNER FROM BEARING TREES  
CORNER WAS DESTROYED BY VANDALS. CORNER IS  
6" BELOW SURFACE OF SAND.

IN THE PRESENCE OF: DAN McHUTT - GALE ARTHUR

DATE: 6-19-74

PHOTO#:

TITLE

\* = County corner tag affixed.

TILLAMOOK COUNTY REWITNESS

N.W. HOLD SEC.

WITNESS COR. TO SEC 18-19 T 3S R 10 W., WM.

S. E. DEC. #

HISTORICAL:

CONDITION


FOUND:

COMMENTS:

1/4 S 18  
S 19

REWITNESS

1 SET. 1 1/2" IR ON PIPE WITH 3" BRASS CAP IN 10" CONCRETE  
CYLINDER FROM FOUND BEARING TREES.  
60" Hat Section 2" NORTH



NEW ACCESSORY; RESCRIBED OLD B.T.S ON NEW FACE

* 22" FIR Now 23" FIR	S 76° W. 14.06'	B.O.T MON SPIKE
DISTANCE TO MONUMENT SPIKE 6' BELOW OLD FACE		
* 20" FIR Now 24 1/2" FIR	N. 23 1/2° E. 32.12'	B.O.T MON SPIKE
DISTANCE TO MONUMENT SPIKE 9 1/2' BELOW OLD FACE		

COMMENTS: SEE PREVIOUS CORNER CARDS FOR  
MORE INFORMATION.

IN THE PRESENCE OF: DAN MCNUTT AL DVORAK

DATE: 6-18-85

PHOTO#:

TITLE

\* County corner tag affixed.

County corner tag affixed

TILLAMOOK COUNTY REWITNESS

DVIF

18

WITNESS

COR.

SEC.

18  
19

T 35

R 10

W., WM.

19

HISTORICAL:

CONDITION

FOUND

COMMENTS: