

TILLAMOOK COUNTY REWITNESS #623

WHOLE SEC. 19 20 T 3 S R 10 W., WM.
 1/4 COR. E.

BY THE PRESENCE OF:


HISTORICAL:

| | |
|-----------------|--|
| Book 10 Page 58 | |
| 4 16 | |
| GLO 45 | |
| MAP F-40-58 | |

| CONDITION | FOUND: |
|--|---------------------------|
| ALL LISTED IN | BOOK 10 PAGE 58 ARE GONE. |
| ALL LISTED IN | BOOK 4 PAGE 16 ARE GONE. |
| B.T.s LISTED ON | MAP F-40-58 ARE GONE. |
| ALL GLO B.T.s | ARE GONE. |
| RAN LINE FROM SECTION CORNER 17-18-19-20 TO THE SECTION CORNER 19-20-29-30. USING DATA FOUND ON MAP F-40-58 I COMPUTED A POSITION FOR 1/4 CORNER AND FOUND A 3/4" Iron Axle within a few tenths of computed position (± 0.30 south of computed position) | |

REWITNESS

1 SET 2" Iron Pipe with 3" Brass Cap in 10" Tile and concrete in Place of found Iron Axle feet

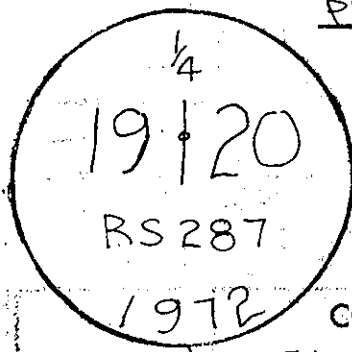

*96 " Hat Section S06°W 14.82

NEW ACCESSORY:

| | | |
|---------------------|-------------|---------|
| BE-Y-128 Power Pole | N05°E 23.62 | △ |
| Service Power Pole | N81°E 96.40 | △ |
| 32" Spruce | S07°E 36.05 | scribed |

COMMENTS: Corner is in a small lane which proceeds EAST from Galloway Road. Corner is located in the north track in a North-South fence line. Bill Myers knew of this axle as being the corner to sections 19/20.

IN THE PRESENCE OF: Rogar Knipple AL E. DUNCAN
 Gale Arthur Geo. W. URREY

DATE: July 1972 PHOTO#: REC

* = County corner too affixed.