


CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)

Tract or Survey No. KUMSDICK 17-14-11 Cor. No. _____

3 P-17
S. R. LOW
WILL.

R.D. Hebo County TILLAMOOK
N.F. SUSLAW State ORE

631

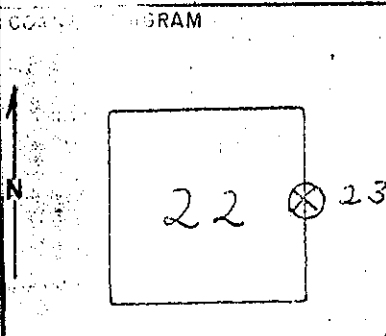

DESCRIBE CORNER MONUMENT FOUND G.L.O 1882 MARKED 10" HEMLOCK FOR CORNER POINT AND WITNESSED;
6" HEM., S. 7° E., 12 LKS.
8" HEM., N. 72° E., 18 LKS.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND M. WHITMORE, 3-20-52 FOUND SCRIBE MARKS ON THE CORNER TREE. THE ORIGINAL BT'S WERE GONE. WHITMORE THEN RE-WITNESSED TWO FIR TREES;
30" FIR, N. 5° W., 17 1/2 FT. SCRIBED 1/4 S 22 BT.
20" FIR, S. 10° E., 39 1/2 FT. SCRIBED 1/4 S 23 BT.

PHOTO IDENTIFICATION DATA
Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER
9-14-71
THE CORNER IS IN THE CENTER OF A 12 YEAR OLD LOGGED AREA AND BELOW A ROAD WHERE MUCH SIDE CAST DIRT BURIED THE CORNER STUMP AND PARTIALLY COVERED THE FIR STUMPS WHITMORE HAD RE-WITNESSED.

PLANE COORDINATE POSITION DATA
State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency _____

Signature Leonard Whitmore Title Forestry Tech Division Timber Headquarters Hebo Date 9-14-71 7100-52 (3/68)

NOTE: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT
I SET 1/2" GALV. PIPE WITH IRON FENCE POST ALONGSIDE WITH "PENALTY TO DESTROY" SIGN ATTACHED.

LEONARD WHITMORE IS A DEPUTY COUNTY SURVEYOR EMPOWERED TO RE-WITNESS POSITIVE EVIDENCE OF ORIGINAL MONUMENTS.

ACCESSORIES : DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE
IN ADDITION TO WHITMORES 2 WITNESS TREES, I WIRE A LOCATION TAG A 3" FIR, S, 9° W., 9 1/4 FT. AND A 3" FIR, N. 31° E., 19 FT. BLAZE A SMALL LAZE ON THE FIRS.

Leonard Whitmore, Tilla. Co. dep. surveyor 9-14-71

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____
Certified Cor. Record Prepared? Yes No Filed At: _____ Date _____

REMARKS
FOUND 20" FIR STUMP, S. 10° E., 39 1/2 FT. WITH WHITMORES SCRIBES 1/4 S 23 SHOWING.
FOUND 30" FIR STUMP, N. 5° W., 17 1/2 FT. MOSTLY BURIED. FOUND 2 NAILS NEAR TOP OF TUMP. THE SCRIBING IS APPARENTLY BURIED ABOUT 3 FT. BENEATH DIRT.

Index File No. T. 35 R. 10W M. Tract or Surv. No. 4 Cor. 22/23