


Index File No. _____ Tract or Survey No. _____
 T 4S R. 8W R.D. Hebo County TILLAMEOK Cor. No. J-13
 Merid. Will. N.F. SIUSLAW State ORE. **#668**

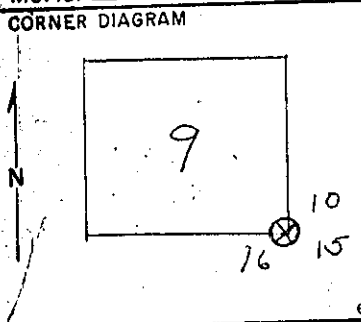

DESCRIBE CORNER MONUMENT FOUND GLo 1884 SET A POST FROM WHICH
 A 36" SNA9, N. 82°30'W., 42 LKS.
 A 24" SNA9, S. 65°15'W., 76 LKS.
 A 20" SNA9, N. 42°E., 84 LKS.
 A 20" SNA9, S. 30°E., 18 LKS.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND
 Found 1/2" GALV. PIPE, 12 ABOVE GROUND SET BY M. WHITMORE USFS
 3-4-58.

PHOTO IDENTIFICATION DATA
 Photo No. _____
 Filed At. _____
 Object Ident. _____
 Ident. By _____
 Signature _____

FOUND THE 4 ORIG. BT'S IN THEIR PROPER BEARING AND DISTANCE AS IN RECORDS. ALL ARE IN BADLY DECAYED CONDITION WITH ALL MARKS BURNT OR ROTTED AWAY.

PLANE COORDINATE POSITION DATA
 State _____ Zone _____
 X _____
 Y _____
 Estab. By _____
 Agency _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER
 FOUND AN OLD LINE BLAZE ON E. SIDE OF A 38" SNA9 ABOUT 50 FT. E. OF CORNER.
 FOUND AN OLD ORIG. BLAZE ON A SNA9 ABOUT 600 FT. NORTH OF CORNER POINT.

Signature Edward Whitmore Title Forestry Tech Timber Divis Hebo Headquarters _____ Date 1-3-69
 7100-52 REV. 65 5

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

M. WHITMORE, USFS, 3-4-58 MARKED 4 NEW BT'S:
 24" FIR, N. 41°E., 36 1/2 FT. I FOUND THESE WITNESSES WITH HEALED FACES AND LOCATION SIGNS ON EACH.
 18" FIR, S. 21°W., 22 FT.
 1-8" FIR, N. 80°W., 19 1/2 FT.
 24" FIR, S. 80°E., 22 FT.

Work Done By _____ Title _____ Date _____ State Registration No. _____
 or Agency _____

Certified Cor. Record Prepared? Yes No Filed At: _____ Date _____

REMARKS

File No. _____ T _____ R _____ M _____ Tract or Surv. No. _____ Cor. _____