


Index File No. J-5 CORNER RECORD (SEARCH) (Ref. FSM 7151.4) Tract or Survey No. #968 Cor. No. 718
 T 65 R. 9W R.D. Hebo County TILLAMOOK State ORE
 Merid. WILL. N.F. WILLIAM

CORNER DIAGRAM

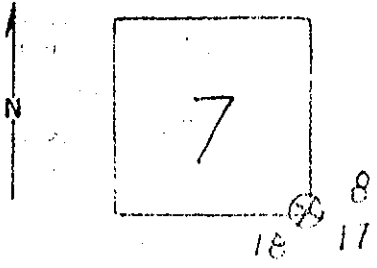

DESCRIBE CORNER MONUMENT FOUND GLC 1880 SET POST 4" M (M.K.D.)
 24" Hem. N. 46° E, 24 LKS.
 24" Hem. S. 28° E, 34 LKS.
 30" Hem. N. 42° W, 22 LKS.
 36" Fir. S. 5° W, 15 1/2 LKS.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND
 BY RECORD, JOHN FERREST, CIRCA 25 YEARS ^{FOUND} AGO
 ONE ORIGINAL BT. LOGGING AND WINDTIRE ^{DESTROYED}
 THE OTHER BT.

PHOTO IDENTIFICATION DATA -

Photo No. ETJ-5-210
 Filed At. _____

He used a 10" Hem. for corner, scribing 1" (1" on N.W.), 5" on N.E., 19 1/2" on S.E., and 18" on S.W.

Object Ident. WITHIN MET.

Ident. By WILLIAM Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER
 FOUND 48" FIR STUMP, S. 5° W, 34 1/2 FT. WITH OLD ARE MARKS AND ONE SCRIBE MARKS.

PLA Leonard Whitmore Title _____ Division _____

Headquarters Hebo Date 3-19-74

THE OTHER ORIG. BT. ARE UPROOTED OR BADLY ^{DECAYED} DECEASED
 USING THE ORIGINAL DISTANCE AND ^{BEARING} BEARING
 FROM THE ORIG. S.W. BT, THE CORNER ^{FALLS} FALLS
 N 70° W, 5 FT. FROM COR. TREE BY JOHN FERREST.

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set 3 1/8" IRON ROD

ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

I SCRIBE 3 TREES
 24" Hem., S. 70° E, 6 FT. SCRIBED "T6SR9WS17BT" VAR. 21
 8" Fir, N. 35° W, 13 1/2 FT. SCRIBED "T6SR9WS7BT" DISTANCES ARE ^{TO} TO
 16" Hem., N. 57° E, 38 1/2 FT. SCRIBED "T6SR9WS8BT" Side-center.

Leonard Whitmore, Tillamook County Deputy Surveyor 3-19-74

Work Done By _____ Title _____ Date _____ State Registration No. _____ or Agency _____

Certified Cor. Record Prepared? Yes No Filed At: _____ Date _____

REMARKS

Index File No. T.65 R.9W M Tractor Survey No. SEC. COR. 718