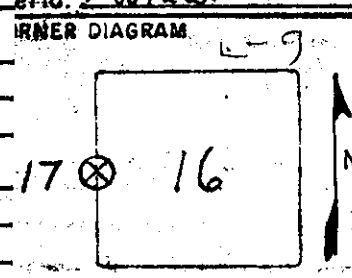


TGS R. 10W	R.D. Hebo	County TILLAMOOK	USES
brid. WILL.	N.F. STUSLAW	State ORE.	File L-9
CORNER DIAGRAM	DESCRIBE CORNER MONUMENT GLO 1890 SET POST & MKC #1004		
	12" Hem., N. 35° E., 16 LKS.		
	7" Hem., S. 33° W., 8 LKS.		
	DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND		
	FOUND 9" Hem., S. 33° W., 5 3/4 FT. WITH VISIBLE SCRIBING ON ROTTED FACE.		
	FOUND 25" Hem., N. 35° E., 10 1/2 FT. WITH VISIBLE SCRIBING ON ROTTED FACE.		
PHOTO IDENTIFICATION DATA	DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH		
Photo No. ETJ-5-159			
Map No. Hebo			
Object Ident. DIRECT			
Done By L. WHITMORE			
Signature			
NAME COORDINATE POSITION DATA			
Zone			
BY SENT TO SO			
Date			

Set 3/4" GALVANIZE PIPE

Leonard Whitmore is a Dept. of Surveying employee of the USFS with 12/19

REMARKS: positive, identifiable monument found and connected with USFS work.

ACCESSORIES : DESCRIBE NEW BT & WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING

MARK 2 NEW TREES;

25" Hem., S. 48° E., 15 3/4 FT. SCRIBED 1/4 S 16 CS BT.

31" SPRUCE, N. 12° W., 30 FT. SCRIBED 1/4 S 17 CS BT.

VAR. 21° DISTANCES ARE TO SIDE-CENTER.

Leonard Whitmore, Tillamook County Deputy Surveyor

Work Done By _____ Title _____ Date _____ State Registration No. _____
or Agency _____

Certified Cor. Record Prepared? Yes No Filed At _____ Date _____

REMARKS

POINT RED BAND AROUND AND ATTACH LOCATION SIGNS TO BT'S

CORNER IS 100 FT. NORTH OF CASCADE HEAD ROAD.

17/16