


7047

SURVEY RECORD  
CROWN ZELLERBACH

SE SEC CORNER  
SEC 9 TWP 2N RGE 7W WM

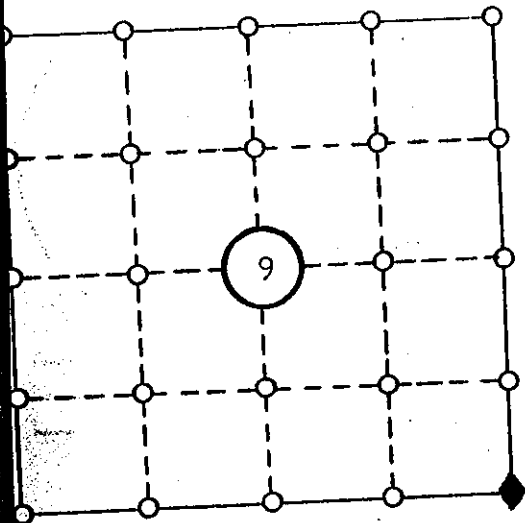

MONUMENT AND ACCESSORIES		
Set basalt stone 20"x12"x8", 15" in ground, for corner to Secs. 9, 10, 15, & 16, mkd. 4 notches on south and 3 on East edges, from which a Fir, 62" dia. S13 E 31lks. no other trees convenient. raised mound of stone 1 1/2 feet high.		
REFERENCE	DATE	FILED UNDER

COMMENTS:

CORNER VISITS

MONUMENT/ACCESSORY*	LOCATION FROM CORNER	WITNESSES	DATE
<p>Found corner Found 53" Fir BT marks "T2" visible. Face burnt out. Ring count shows 25 years since bearing face was made blazes show up on other trees close by, e.g. 6' Fir (green top) in NE quadrant. No marked stone found, although possible to have rolled down hill. This corner fits calls on ground OK. Small creek to south and west, 1.15ch. S and 0.60ch. West. 5 1/2' Fir with old blaze 200' West on ridge. No cruisers marks on this corner. 20"x12"x8" basalt stone with mound of stone alongside; now missing, from which a: 62" Fir now 50" snag, scribe marks "T2" exposed on burnt face. Set 1 1/2"x36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY T2N R7W S9 S10 S16 S15 1952 2311" 2 1/2' in ground. Raised mound of stone around corner pipe, from which a: 24" Fir stub 18' high mkd. "T2NR7WS16BT" S56 W 10.0ft. 72" Fir mkd. "T2NR7WS15BT" S85 E 8.3ft. 54" Fir stub 12' high, mkd. "T2NR7WS9BTRE2311" N35 W 29.1ft. 84" Fir mkd. "T2NR7WS10BT" N07 E 14.0ft. O.S.B.E.Y.M.L.P. on this tree</p>	31lks.	B.L. Mitchell (Long Bell R/R)	?
		Louis W. Amort Don D. Davis Gerald M. Schwalen	12/16/52

\*NOTE CONDITION AND ORIGIN

**CORNER VISITS**

MONUMENT/ACCESSORY*	LOCATION FROM CORNER	WITNESSES	DATE
<p>At the corner to secs. 9, 10, 15 &amp; 16, T2N, R7W, I find pipe and four BT's set by Louis W. Amort, RE2311, for the Oregon State Board of Forestry. No original BT now exists, though an unmarked stump conforms in direction and distance with the notes which list only a 62" Fir bearing S13 E 31lks, stating that there are no other trees convenient of the corner, dated Dec. 16, 1952, Mr. Amort states, "62" Fir brs S13E 31lks; now 50" snag, scribe marks T2 exposed on burnt face." In a verbal communication with Mr. Amort has stated that shortly thereafter he found the snag felled in logging and that he chopped the scribed section from the log and preserved it in his office. The statement by the original surveyor that there was only one BT convenient to the corner is clearly erroneous.</p>		B. Mason Jr.	10/10/56

\*NOTE CONDITION AND ORIGIN

TILLAMOOK COUNTY REWITNESS

<p>DVLE:</p>		<p>N.W. 1/4 SEC. COR. _____ T _____ R _____ W., WM. S. E. DLC. # _____</p>																			
		<p>HISTORICAL:</p> <table border="1"> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> </table>																			
<p>CONDITION</p> <table border="1"> <tr><td> </td></tr> <tr><td> </td></tr> <tr><td> </td></tr> <tr><td> </td></tr> <tr><td> </td></tr> </table>						<p>FOUND:</p> <table border="1"> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> </table>															
<p>COMMENTS:</p>																					