

CHAINS

SURVEY FOR THE STATE OF OREGON-BOARD OF FORESTRY

Restoration of monument for the sec. cor. to secs. 16, 17, 20, 21
T.1.N. R.6.W. Tillamook County, Oregon.

Sec. COR.
16, 17, 20, 21
T. N. 6.

Found a stake set in 1942
from which the original B.T.s:

A hemlock stump 16 inches in diam. brs S 79° E
a distance of 5.3 feet. No marks remaining on stump
which is badly burned and decayed.

A hemlock stump 8 inches in diam. brs N 38° E
a distance of 7.4 ft with part of scribe B-1 visible.

A hemlock stump 48 inches in diam. brs N 49° W
a distance of 39.7 ft scribed BT below the saw cut.

A hemlock stub 40" in diam. brs S 39° W
a distance of 21.6 ft with scribes \6V T1N S20 plainly visible.

As the location of the stake agrees closely with the call of the
distances of the original notes and within a few degrees of
bearing, I restore the monument for the sec. cor. by setting
an iron pipe 1½ inches in diam., 3 ft. long, filled with charcoal
with an Oregon State Board of Forestry bronze cap stamped
T1N R6W S17 S16 S20 S21 1949 199

from which:

A Noble Fir 6 inches in diam. bears N 18° W a distance
of 52.0 ft. scribed S17 199



Placed a mound of stone 18 inches in diam., 12 inches high,
around the pipe.

Lyle E. Beyers
Lyle E. Beyers
Forest Engineer

Present:

R. M. Kallander
Glen French

October 1949

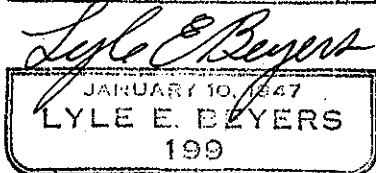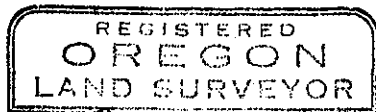

Book I