

CHAINS

ESTABLISHED CORNERS FOR OREGON STATE BOARD OF FORESTRY
(See official plat)

Northwest one-sixteenth corner in Section 30,
T3S, R9W, W.M., Tillamook County, Oregon.

ESTABLISHED

Var. $21\frac{1}{2}^{\circ}E$

Set $1\frac{1}{2}$ " x 36" galvanized iron pipe with 3" bronze cap
marked "OREGON STATE BOARD OF FORESTRY NW 1/16
S30 1957 RS 359," 33 inches in ground, and from which a:

- 15" Fir bears $S89^{\circ}E$ 11.2 ft.; scribed NW 1/16 S30 BT RS 359.
- 12" Fir bears $N45^{\circ}W$ 55.9 ft.; scribed NW 1/16 S30 BT.

Oregon State Board of Forestry metal location poster on
15" Fir BT.

Set 4"x4"x60" white painted Cedar post 1.0 feet NW of pipe.

West one-sixteenth corner common to Sections 30 and 31,
T3S, R9W, W.M., Tillamook County, Oregon.

ESTABLISHED

Var. $21\frac{1}{2}^{\circ}E$

Set $1\frac{1}{2}$ " x 36" galvanized iron pipe with 3" bronze cap
marked "OREGON STATE BOARD OF FORESTRY W 1/16 S30 S31
1957 RS 359," 33 inches in ground, in mound of stone,
and from which a:



- 29" Fir bears $N60^{\circ}W$ 77.1 ft.; scribed W 1/16 S30 BT RS 359.
- 23" Fir bears $S27^{\circ}E$ 249.8 ft.; scribed W 1/16 S31 BT.

Oregon State Board of Forestry metal location poster on
29" Fir BT.

Set 4"x4"x60" white painted Cedar post 1.0 feet NE of pipe.

Dated February 21, 1957.

Established by Richard Morris under my direction.
Richard Morris, Transitman

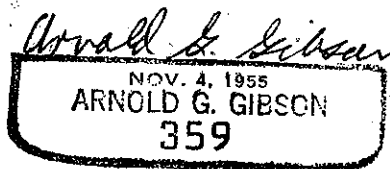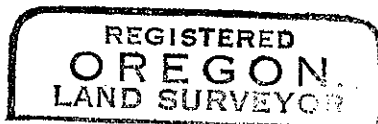

Present and witnessed by Lloyd Geraths
Robert Sturm