

CHAINS

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

Section corner common to Sections 19, 24, 25 and 30, T.3N, Rgs. 5&6W, W.M., Tillamook & Washington Counties, Oregon.

ORIGINAL

8" Hemlock for corner (now just roots in place) from which a:

72" Fir bears N45°W 5 lks.; now 54" stump, edges of burnt out face visible, found as 72" fir N45°W 5 lks. in 1892 resurvey.

4" Hem. bears S10°E 20 lks.; found as 5" Hem. S20½°E 23 lks. in 1892 resurvey, traces of roots remaining.

4" Hem. bears S45°W 20 lks.; found as 4" Hem. S48°W 23 lks. in 1892 resurvey, traces of roots remaining.

80" Fir bears N45°W 50 lks.; found as 48" Fir N38½°W 55 lks. in 1892 resurvey, now 36" stump, face burnt off.

RESTORED by T3N R6W surveyors in 1892.

Found 4" Hem. corner tree (now just roots in place) from which a:

Remarked 72" Fir bears N50°E 5 lks.; found as above.

60" Fir bears S48°E 48 lks.; now 49" uproot, roots in place, face burnt off.

8" Hem. bears S22½°W 59 lks.; now missing, burnt out.

36" Fir bears N44-45°W 96 lks.; now 34" stump, burnt out face with trace of scribing and axe work.

RESTORED

Var. 21½°

Set 1½" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY T3N R6W R5W S24 S19 S25 S30 1957 RS 359," 34 inches in ground, and from which a:

7" Fir bears S27°W 8.4 ft.; scribed T3N R6W S25 BT.

7" Fir bears S30°E 10.0 ft.; scribed T3N R5W S30 BT.


8" Fir bears N13½°E 43.3 ft.; scribed T3N R5W S19 BT.

9" Fir bears N79°W 26.7 ft.; scribed T3N R6W S24 BT RS 359.

Set 4" x 4" x 60" white painted Cedar post 1.5' SW of pipe. Oregon State Board of Forestry metal location poster on 7" Fir BT in SE.

Also poster on 4" x 4" x 60" white painted Cedar post 95.8 ft. W on E edge of Wheeler Road.

Dated January 31, 1957.

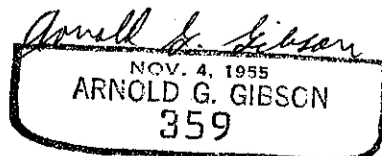

Book I