

CHAINS

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

Section corner common to sections 24 and 25 on the East range line Township 2 North, Range 7 West, W.M., Tillamook County, Oregon.

ORIGINAL

15" Fir, now 17" green tree scribe mark N exposed on NW, from which a:

18" Fir bears S47W 28 lks; now 24" green tree S37W, did not expose old face.

14" Fir bears N10W 15 lks; now 17" green tree N20W, scribe marks T2N R7W S24 exposed on burnt face.

RESTORED BEARING TREES

As a reference monument

Set 1 1/2" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY RM T2N T2N S24 S30 S25 R7W R6W 32 Ft. S 1952 2311," 2 1/2" in ground North 32.0° from corner. Raised mound of stone around pipe.


18" Fir bears N10W 12.5' from corner; scribed T2N R7W S24 BT RE 2311.

Placed an Oregon State Board of Forestry metal location poster on NW side of 17" Fir tree and marked it: Sec 24 T2N R7W Sec 24/25 Cor this tree.

Dated June 7, 1952.

This corner was restored by under my direction.

Don D. Davis
Don D. Davis Assistant Forest Engineer

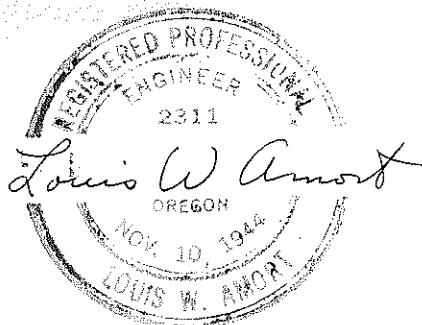

Present and witnessed by

Richard A. Morris
Richard A. Morris Compassman

Present and witnessed by

Robert A. Young
Robert A. Young Chainman