

CHAINS

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

Witnessed closing corner common to sections 3 and 4, T1S R7W, WM., Tillamook County, Oregon.

ORIGINAL

Post; now missing, from which a:

40" Cedar bears S50E 71 lks; now 48" snag, scribe marks 1S R7W S3 exposed.

12" Hemlock bears N18E 53 lks; now missing.

8" Barberry bears S79W 23 lks; now missing.

WITNESSED CORNER as point for closing corner falls on road cut.

Set 1 1/2"x36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY WC T1N R7W S33 S4 S3 T1S R7W CC 50 Ft. N 1952 2311," 2 1/2" in ground 30 feet South of corner point. Raised mound of stone around witness corner pipe, from which a:


70" Fir stump bears S67°15'W 93.4'; scribed X BT.

72" Fir stump 13' high bears S53°45'E 29.5'; scribed X BT RE 2311.

Placed an Oregon State Board of Forestry metal location poster on 72" Fir stump BT and marked it: Sec 3 T1S R7W WC Closing Cor 29.5 Ft. N53°45'W.

Dated December 12, 1952

This corner was restored by Don D. Davis UNDER MY DIRECTION. Don D. Davis Assistant Forest Engineer

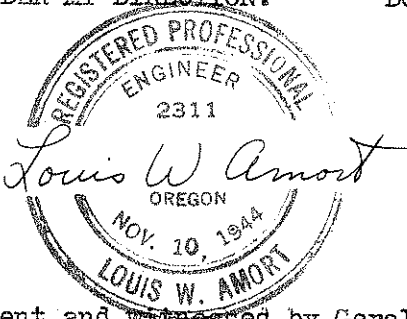

Present and witnessed by Gerald M. Schwalen, Chainman.