

CHAINS

ESTABLISHED CORNERS FOR OREGON STATE BOARD OF FORESTRY
(See official plat)

Center North One-sixteenth corner for Section 20,
T3S, R9W, W.M., Tillamook County, Oregon.

ESTABLISHED

VOID: See plat # B-511

Set 1 1/2" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY N 1/16 S20 C---C 1961 RE2311", 34 inches in ground, and from which a:

15" Hemlock bears N86 1/2° W 32.2 ft.; scribed CN 1/16 S20 BT.
10" Hemlock bears N58° E 27.8 ft.; scribed CN 1/16 S20 BT RE2311.

Set 4" x 4" x 72" white painted Cedar post 1.5 ft. SE of corner pipe. Oregon State Board of Forestry metal location poster on 15" BT.

Present and witnessed by D. McConnell, R. Schulson

North One-sixteenth corner common to Sections 20 and 21, T3S, R9W, W.M., Tillamook County, Oregon.

ESTABLISHED


Set 1 1/2" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY N 1/16 S20 S21 1961 RE2311", 32 inches in ground, in mound of rock, and from which a:

33" Hemlock bears S6° W 26.9 ft.; scribed N 1/16 S20 BT.
34" Hemlock bears S35 1/2° E 46.8 ft.; scribed N 1/16 S21 BT RE2311.

Set 4" x 4" x 72" white painted Cedar post 1.5 ft. SW of corner pipe. Oregon State Board of Forestry metal location poster on 33" BT.

Dated July 11, 1961

Established by *Billy E. Davis* under my direction.
Billy E. Davis, Transitman

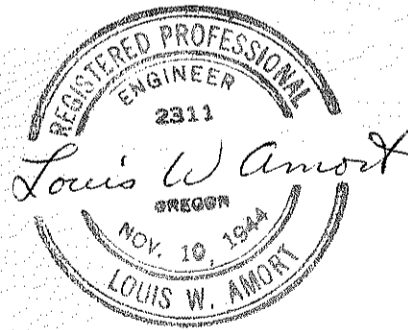

Present and witnessed by D. McConnell
R. Schulson
J. Damiano