

County Surveyor's Record, Tillamook County, Oregon

CHAINS

REWITNESSED CORNER FOR STATE OF OREGON--DEPARTMENT OF FORESTRY

Section corner common to Sections 5, 6, 31 and 32, T3&4N, R8W, W.M., Clatsop and Tillamook Counties, Oregon.

ORIGINAL

Basalt stone, 13" x 8" x 6" (in place, 5 notches on East and 1 on West edges) from which a:

- 50" Cedar bears N32°E 42 lks.; now a 55" stump N32°E 26.7', cut low to ground.
- 20" Hemlock bears S77°E 111 lks.; now a 30" stub in place with edge of face visible, scribes rotted away.
- 12" Hemlock bears S76°W 52 lks.; now a 20" stub in place using slope measurement, bottom of face visible with scribes rotted away.
- 15" Hemlock bears N70°W 52 lks.; now a 24" stub in place using slope measurement, with scribes T4N R8S visible.
- 3 Lk brook bears West 0.10 chains; corner now in creek bottom which has visibly changed up to 20' East and West over the years, crs N20W from S20E.

Re-witnessed by P. L. Thompson, Feb. 13, 1953

12" Hemlock bears N22°E 28.9 ft.; now 28".

REWITNESSED

Var. 21½°E


From original basalt stone in mound of rock, a:

- 39" Spruce bears N76½°W 42.8 ft. to face; scribed T4N R8W S31 BT RS401.
- 28" Hemlock bears N23°E 27.8 ft. to face; scribed T4N R8W S32 BT.
- 41" Spruce bears S76¼°E 40.7 ft. to face; scribed T3N R8W S5 BT.
- 96" Cedar stump bears S89°W 33.7 ft. to face; scribed T3N R8W S6 BT.

Set 4" x 4" x 60" white painted Cedar post 2.0 ft. SE of corner stone. Oregon State Forestry Department metal location poster on the 28" Hemlock BT.

Dated September 1, 1977

Rewitnessed by Loren R. Steele under my direction  
Loren Steele, Forest Engineer

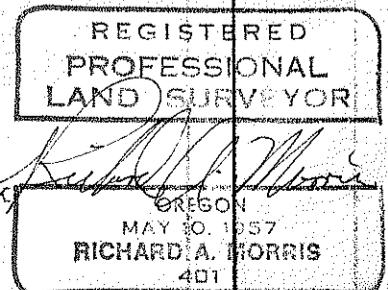

Present and witnessed by T. Withrow and O. Hendrick