


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Wilson in 1890 set a post, 4 ins. sq., 4 ft. long, 24 ins. in ground, mkd. T 6 S R 10 W S 2 on NW., T 6 S R 10 W S 1 on NE. face, T 6 S R 10 W S 12 on SE., T 6 S R 10 W S 11 on SW. face, 5 notches on S. and 1 on E. edge from which:

- Alder 12" diam. bears S65⁰E, 31 lks.
- Alder 10" diam. bears N50⁰E, 39 lks.
- Alder 8" diam. bears N20⁰W, 21 lks.
- Alder 10" diam. bears S29⁰W, 22 lks.

All trees mkd. as per instructions



Description of corner evidence found:

Monument found:

1" x 30" GIP set by O. R. Miller, Longview Fibre, 1949. Miller found 3 of orig. BT's. A notation in GLO notebook states Homer Hildenbrand, USFS, 1947, found 2 orig. BT's.

BT's found:

- Orig. BT's gone.
- Hemlock, blowdown, 44" diam. bears N43⁰W, 39.1 ft. (Record N47⁰W) healed blaze (Miller's BT).
- Hemlock stump 26" diam., 7' high, bears S23⁰E, 11.6 ft. (Record S27⁰E) scribe marks visible (Miller's BT).
- Creek, coarse NE as called for in orig. notes is located 1.25 chs. N. of the corner point.

Description of monument and accessories established to perpetuate the original location of this corner: September 10, 1979

Set an aluminum post, (with magnet in top and bottom) 30" long, 3" diam., 24" in the ground, with aluminum cap mkd. 1" GIP buried alongside aluminum post.

Accessories: Scribe 1 new BT

- Hemlock 4" diam., bears S76⁰E., 41.3 ft. blaze and mkd. X BT.
- No other suitable bearing trees available.
- Painted face and 6" red band on new BT.
- Painted 6" red band on SE BT (stump).
- BT tag and ATTN sign put on back of BT's.
- Placed ATTN sign on post 5'± north

T 6 S R 10 W
S 2 | S 1
S 11 | S 12
LS 1017
1979

Basis of Bearing


Staff compass was used with a declination of 21⁰E.

I certify this remonumentation and record thereof, was prepared by me or my assistants under my supervisory direction and is true and correct to the best of my knowledge.

Witness Leonard Whitmore
Leonard Whitmore

Witness Duane Garoutte
Duane Garoutte

Witness Richard Chesebro
Richard Chesebro

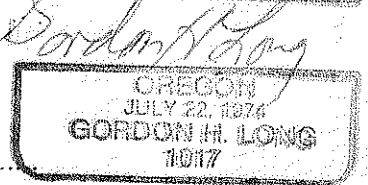

Office of..... County Surveyor..... County of..... Tillamook
State of..... Oregon..... I hereby certify that the within instrument was filed in this office
for record on the...19... day of... Oct 10... 19... 79
County Surveyor... J. J. Carlich... by... Allan E. Duncan...
(COUNTY OFFICIAL) (DEPUTY)